

INVERTER STARTER 10kVA


P/N: Q726
DESCRIPTION: INVERTER STARTER
NOMINAL POWER: 10 kVA

INPUT LINE: 450/900 V DC
OUTPUT LINE: THREE-PHASE 380V 120Hz (current 15A)
DIMENSIONS & MASS: WDH [mm] 300x352x500
(without resilient)
MAX 50 Kg

MAIN PROJECT STANDARDS REFERENCES:

- MIL-STD-810 (Environmental conditions)
- MIL-STD-461 (EMC)*
- MIL-STD-167-1 (Vibration)*
- MIL-STD-740 (Noise)*
- MIL-S-901 (Shock)

* Test performed by laboratory

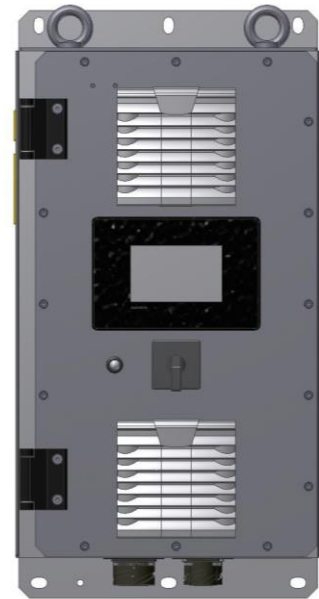

COOLING SYSTEM: FORCED AIR
IP GRADE: IP54
ELECTRIC INTERFACE: MIL CONNECTORS

SYSTEM (e.g.)
AC MOTOR STARTER FOR COOLING SEAWATER PUMP,
TRIM PUMP, DISTILLATE FILLING PUMP

APPLICATION FIELD: NAVAL DEFENCE
END USER: SOUTH KOREAN NAVY

KEY POINT: LOW AIRBORNE & STRUCTUREBORNE NOISE



Eurocontrol S.p.A., società a socio unico

Via Luigi Cibrario, 4 - 16154 Genova | Tel. +39 010 42 25 11
info@eurocontrol-spa.com | www.eurocontrol-spa.com

